


Teledex Diamond L2S-10^{ETM}



Diamond L2S-5^{ETM}

Available with 5 Guest Service Buttons

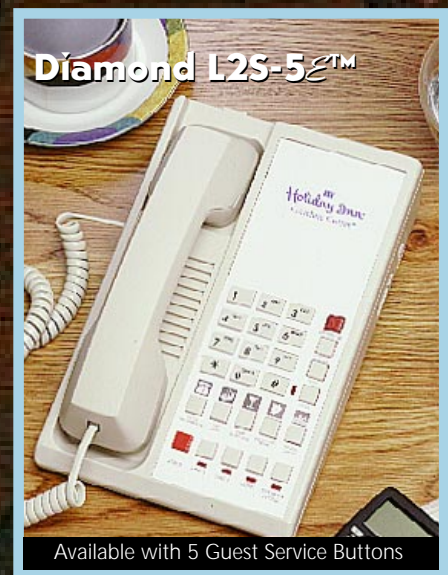

The World's Leading Supplier of Guestroom Telephones

Diamond *Elite* Series

Next Generation Two-Line Speakerphone with MPC™ Technology for Today's Leading Edge Hotels.

FEATURES

- **Two-Line Integrated Speakerphone with Volume Control** allowing simultaneous voice and data port connections.
- **Patent Pending MPC Circuitry** for increased reliability, functionality and elimination of latching line keys.
- **PrimeLine™ / RingLine™ Select** automatically selects the available / ringing line.
- **Electronic 3-Way Call Conference Function** with LED indicator for convenient multi-line conversations.
- **Line Powered**, does not require external power.
- **ADA Handset Volume Boost**, with 3 distinct levels, compliant with HAC/VC and FCC requirements.
- **L2S-10£: Ten (10) Guest Service Buttons** allow guests to contact hotel services with the touch of a button.
- **L2S-5£: Five (5) Guest Service Buttons** allow guests to contact hotel services with the touch of a button.
- **Data Port** for easy access to telephone line for laptop modem or fax machine use.
- **Patented MultiX™ Message Waiting Circuitry** guarantees operation of up to 10 phones for suite applications, with a new extra-bright message waiting lamp (up to 300% brighter).
- **Raised Red Message Waiting** lens can be seen from any area in the guestroom.
- **Speaker On / Off Key** with red LED for easy activation of speakerphone calls.
- **Hold Key** places the active line on hold so the second line can be used or a conference call initiated.
- **Hold Release** detection circuit releases calls on hold when the line is accessed by any telephone.
- **Mute Key** deactivates microphone during speakerphone and handset calls. A red LED indicates when mute is activated.
- **Redial Key** automatically redials the last number dialed.
- **Textured Finish** provides durable surface that resists smudges and scratches.
- **Full-length Paper Faceplate** allows customization and makes the telephone user-friendly.
- **Desk or Wall Mountable** providing flexibility in room placement.
- **Hidden Programming Key** eliminates arbitrary reprogramming of autodial keys.

SPECIFICATIONS

Standard Color	: Ash (Black Optional)	Operating Voltage	: 24 to 56 VDC Non Polarity
Footprint	: 6.25" x 9.0"	Signaling	: Standard 12 tone DTMF/Pulse
Weight	: 2.3 pounds	Flash Timing	: 600 ms
Packaging	: 12 per carton	Ringer Equivalence	: Z
Faceplate Size	: 8.75" x 3.13"	Cabling	: 2 pair minimum
FCC Specifications	: Meet or exceeds Part 15, Subpart J, Class A, Part 68	Registered Connector	: USOC RJ-14
Safety Standard	: ETL and CE	Handset	: Hearing Aid compatible Standard "K" type or Euro type
		Handset Cord	: 10 foot coil cord
		Line Cord	: 15 foot, 2 pair